


Kurzbauende Sonder Gleitringdichtung Stationärer Gleitring Wellfeder

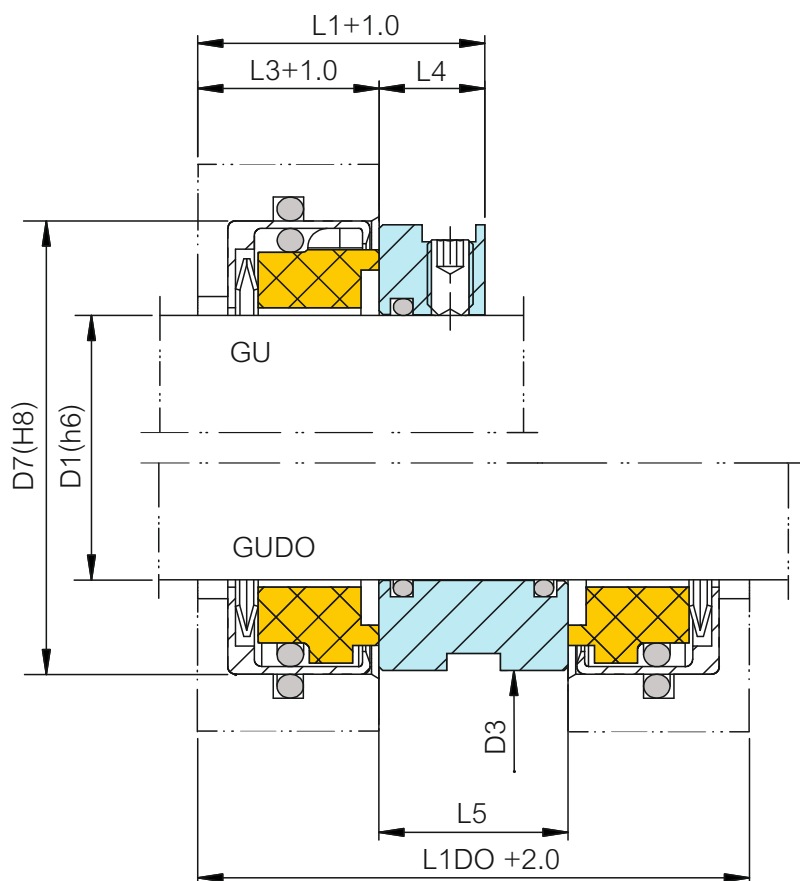

Werkstoffe:

Rotierend: E, G, W,

Stationär: A, B

Nebendichtungen: P, E, V, K, M

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 112)

$p \leq$	15 bar
$t =$	$-35 \div 150^\circ\text{C}$
$v \leq$	20 m/s

D1	D7	D3	L1	L1DO	L4	L3	L5
10	30	28	29	53	13	16	21
12	32	30	29	53	13	16	21
15	35	33	29	53	13	16	21
18	38	36	29	53	13	16	21
20	40	38	30	57	14	16	25
22	42	40	30	57	14	16	25
25	45	43	30	57	14	16	25
26	50	48	33	63	14	19	25
28	53	51	33	63	14	19	25
30	55	53	33	63	14	19	25
35	60	58	33	63	14	19	25
40	65	63	36	65	17	19	27
45	70	68	36	65	17	19	27
50	75	73	36	65	17	19	27
55	80	78	38	69	17	21	27
60	85	83	38	69	17	21	27
65	90	88	38	69	17	21	27
70	95	93	38	69	17	21	27
75	100	98	38	69	17	21	27
80	105	103	38	69	17	21	27
85	110	108	38	69	17	21	27
90	115	113	38	69	17	21	27
100	125	123	38	69	17	21	27
110	140	138	42	82	17	25	32
120	150	148	45	82	20	25	32
130	160	158	45	82	20	25	32
140	170	168	45	82	20	25	32
150	180	178	45	82	20	25	32