


**Robuste Einzeldichtung**  
**Wellenschonend**  
**Einfache Montage**  
**Drehrichtungsunabhängig**

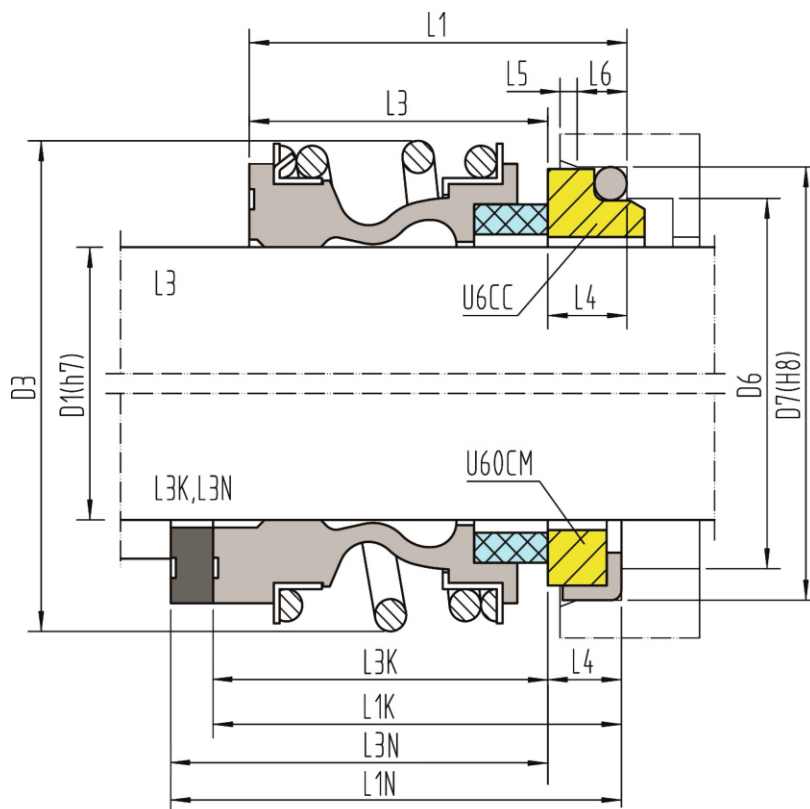

**Werkstoffe:**  
 Rotierend: A, B, Q, U  
 Stationär: Q, U, V  
 Nebendichtungen: P, E, V

**Einsatzgrenzen:**  
 (siehe Betriebsbedingungen Seite 110)

p ≤	12 bar
t =	-20 ÷ 120 °C
v ≤	10 m/s

EN 12756 (DIN 24960)										U6CC	U60CM	
D1	D6	D7	D3	L1	L3	L1K	L3K	L1N	L3N	L4	L6	L5
10	17	21	22.5	21.1	14.5	32.5	25.9	40	33.4	6.6	4	1.5
12	19	23	25	21.6	15	32.5	25.9	40	33.4	6.6	4	1.5
14	21	25	28.5	23.6	17	35	28.4	40	33.4	6.6	4	1.5
15	23	27	28.5	23.6	17	—	—	—	—	6.6	—	—
16	23	27	28.5	23.6	17	35	28.4	40	33.4	6.6	4	1.5
18	27	33	32	27	19.5	37.5	30	45	37.5	7.5	5	2
20	29	35	37	29	21.5	37.5	30	45	37.5	7.5	5	2
22	31	37	37	29	21.5	37.5	30	45	37.5	7.5	5	2
24	33	39	42.5	30	22.5	40	32.5	50	42.5	7.5	5	2
25	34	40	42.5	30.5	23	40	32.5	50	42.5	7.5	5	2
28	37	43	49	34	26.5	42.5	35	50	42.5	7.5	5	2
30	39	45	49	34	26.5	42.5	35	50	42.5	7.5	5	2
32	42	48	53.5	35	27.5	42.5	35	55	47.5	7.5	5	2
33	42	48	53.5	35	27.5	42.5	35	55	47.5	7.5	5	2
35	44	50	57	36	28.5	42.5	35	55	47.5	7.5	5	2
38	49	56	59	39	30	45	36	55	46	9	6	2
40	51	58	62	39	30	45	36	55	46	9	6	2
43	54	61	65.5	39	30	45	36	60	51	9	6	2
45	56	63	68	39	30	45	36	60	51	9	6	2
48	59	66	70.5	39.5	30.5	45	36	60	51	9	6	2
50	62	70	74	40	30.5	47.5	38	60	50.5	9.5	6	2.5
53	65	73	78.5	44	33	47.5	36.5	70	59	11	6	2.5
55	67	75	81	46	35	47.5	36.5	70	59	11	6	2.5
58	70	78	85.5	48	37	52.5	41.5	70	59	11	6	2.5
60	72	80	88.5	49	38	52.5	41.5	70	59	11	6	2.5
63	75	83	92.5	51	40	52.5	41.5	70	59	11	6	2.5
65	77	85	93.5	51	40	52.5	41.5	80	69	11	6	2.5
68	81	90	96.5	51.3	40	52.5	41.2	80	68.7	11.3	7	2.5
70	83	92	99.5	51.3	40	60	48.7	80	68.7	11.3	7	2.5
75	88	97	107	51.3	40	60	48.7	80	68.7	11.3	7	2.5
80	95	105	112	52	40	60	48	90	78	12	7	3
85	100	110	120	55	41	60	46	90	76	14	7	3
90	105	115	127	59	45	65	46	90	76	14	7	3
95	110	120	132	60	46	65	46	90	76	14	7	3
100	115	125	137	61	47	65	46	90	76	14	7	3

Elastomerbalg  
Gleitringdichtungen