


Robuste Einzeldichtung
Wellenschonend
Einfache Montage
Drehrichtungsunabhängig

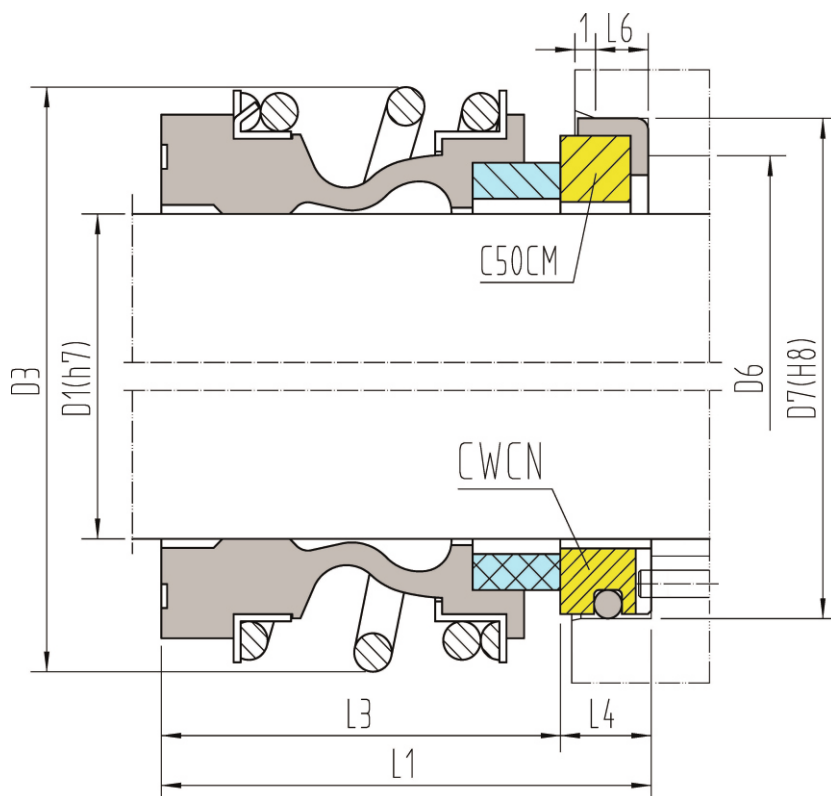

Werkstoffe:

Rotierend: A, B, Q, U
 Stationär: Q, U, V
 Nebendichtungen: P, E, V

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 112)

p ≤	12 bar
t =	-20 ÷ 120 °C
v ≤	10 m/s

Europannorm					C50CM		CWCN	
D1	D1 Zoll	D6	D7	D3	L1	L3	L4	L6
10	0,375	11	24.6	22.5	34	25	9	7.5
12	0,500	13.5	27.8	25	34	25	9	7.5
14	-	17	30.95	28.5	35.5	25	10.5	9
15	-	17	30.95	28.5	35.5	25	10.5	9
16	0,625	17	30.95	28.5	35.5	25	10.5	9
18	0,750	20	34.15	32	35.5	25	10.5	9
20	-	21.5	35.7	37	35.5	25	10.5	9
22	0,875	23	37.3	37	35.5	25	10.5	9
24	-	26.5	40.5	42.5	35.5	25	10.5	9
25	1,000	26.5	40.5	42.5	35.5	25	10.5	9
28	1,125	29.5	47.65	49	45	33	12	10.5
30	-	32.5	50.8	49	45	33	12	10.5
32	1,250	32.5	50.8	53.5	45	33	12	10.5
33	-	36.5	54	53.5	45	33	12	10.5
35	1,375	36.5	54	57	45	33	12	10.5
38	1,500	39.5	57.15	59	45	33	12	10.5
40	1,625	42.5	60.35	62	45	33	12	10.5
42	-	46	63.5	65.5	53	41	12	10.5
43	1,750	46	63.5	65.5	53	41	12	10.5
45	-	46	63.5	68	53	41	12	10.5
48	1,875	49	66.7	70.5	53	41	12	10.5
50	2,000	52	69.85	74	54.5	41	13.5	12
53	2,125	55.5	73.05	78.5	54.5	41	13.5	12
55	2,250	58.5	76.2	81	54.5	41	13.5	12
58	-	61.5	79.4	85.5	54.5	41	13.5	12
60	2,375	61.5	79.4	88.5	54.5	41	13.5	12
	2,500	65	82.55	92.5	54.5	41	13.5	12
65	2,625	68	92.1	93.5	65	49	16	14.5
68	-	71	95.25	96.5	65	49	16	14.5
70	2,750	71	95.25	99.5	65	49	16	14.5
	2,875	74.5	98.45	-	68	52	16	14.5
75	3,000	77.5	101.6	107	68	52	16	14.5
	3,125	80.5	111.15	-	76	56	20	14.5
80	3,250	84	114.3	112	76	56	20	18.5
85	3,375	87	117.5	120	76	56	20	18.5
	3,500	90.5	120.65	-	76	56	20	18.5
90	3,625	93.5	123.85	127	79	59	20	18.5
95	3,750	96.5	127	132	79	59	20	18.5
	3,875	100	130.2	-	82	62	20	18.5
100	4,000	103	133.35	137	82	62	20	18.5

Elastomerbalg
Gleitringdichtungen