


L321-L321K-L321N

Robuste Einzeldichtung
Wellenschonend
Einfache Montage
Drehmomenteinleitung
durch Klauenmitnahme
Drehrichtungsunabhängig

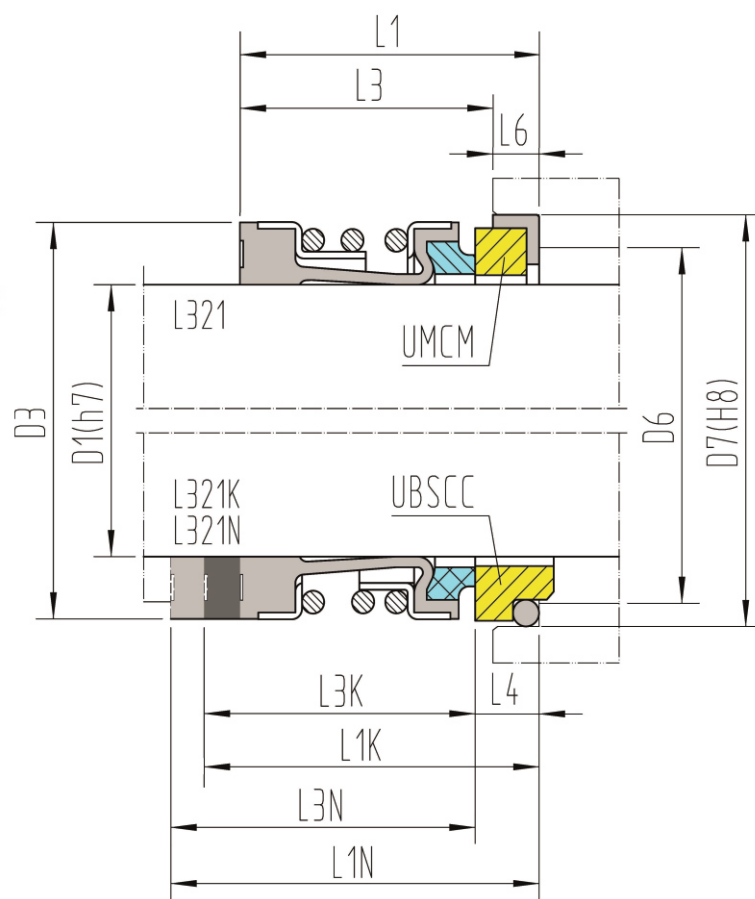

Einsatzgrenzen:
 (siehe Betriebsbedingungen Seite 110)

p ≤	12 bar
t =	-20 ÷ 120 °C
v ≤	10 m/s

Werkstoffe:
 Rotierend: A, B, Q
 Stationär: Q, V
 Nebendichtungen: P, E, V

EN 12756 (DIN 24960)										UBSCC	UMCM
D1	D6	D7	D3	L1	L3	L1K	L3K	L1N	L3N	L4	L6
10	17	21	20	20	15	32.5	27.5	40	35	5	4
12	19	23	22	21	15	32.5	26.5	40	34	6	4
14	21	25	24	21	15	35	29	40	34	6	4
15	23	27	25	21	15	—	—	—	—	6	4
16	23	27	26	21	15	35	29	40	34	6	4
18	27	33	32	26	20	37.5	31.5	45	39	6	5
20	29	35	34	26	20	37.5	31.5	45	39	6	5
22	31	37	36	26	20	37.5	31.5	45	39	6	5
24	33	39	38	26	20	40	34	50	44	6	5
25	34	40	39	26	20	40	34	50	44	6	5
28	37	43	42	32	26	42.5	36.5	50	44	6	5
30	39	45	44	33	26	42.5	35.5	50	43	7	5
32	42	48	46	33	26	42.5	35.5	55	48	7	5
33	42	48	47	33	26	42.5	35.5	55	48	7	5
35	44	50	49	34	26	42.5	34.5	55	47	8	5
38	49	56	54	38	30	45	37	55	47	8	6
40	51	58	56	38	30	45	37	55	47	8	6
43	54	61	59	38	30	45	37	60	52	8	6
45	56	63	61	38	30	45	37	60	52	8	6
48	59	66	64	40	30	45	35	60	50	10	6
50	62	70	66	40	30	47.5	37.5	60	50	10	6
53	65	73	69	40	30	47.5	37.5	70	60	10	6
55	67	75	71	40	30	47.5	37.5	70	60	10	6
58	70	78	78	43	33	52.5	42.5	70	60	10	6
60	72	80	80	45	33	52.5	40.5	70	58	12	6
63	75	83	83	45	33	52.5	40.5	70	58	12	6
65	77	85	85	45	33	52.5	40.5	80	68	12	6
68	81	90	88	45	33	52.5	40.5	80	68	12	7
70	83	92	90	45	33	60	48	80	68	12	7
75	88	97	99	52	40	60	48	80	68	12	7
80	95	105	104	52.5	40	60	47.5	90	77.5	12.5	7
85	100	110	109	52.5	40	60	47.5	90	77.5	12.5	7
90	105	115	114	52.5	40	65	52.5	90	77.5	12.5	7
95	110	120	119	52.5	40	65	52.5	90	77.5	12.5	7
100	115	125	124	52.5	40	65	52.5	90	77.5	12.5	7

Elastomerbalg
Gleitringdichtungen