


2RU2-2RU2CA

**Universelle Allround-Dichtung
Kegelfeder rotierend
Massive, gelötete oder
eingeschrumpfte Gleitringe**

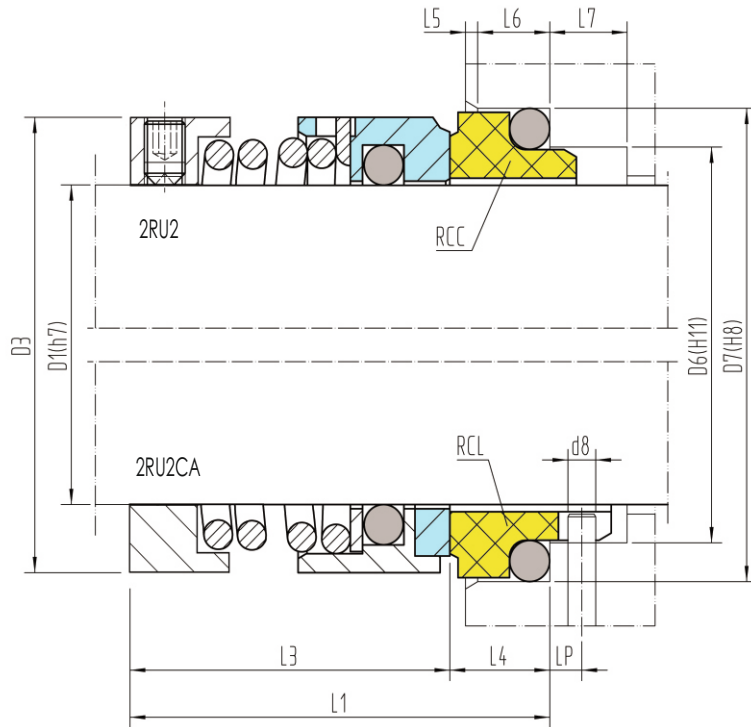

Werkstoffe:

Rotierend: A, B, E, F, G, Q, U

Stationär: A, B, Q, U

Nebendichtungen: P, E, V, K, M

Einsatzgrenzen:

(siehe Betriebsbedingungen Seite 112)

p ≤	12bar (16bar)
t =	-35 ÷ 140°C (180°C)
v ≤	15 m/s

Spezielle Einbauräume

RCC RCL

D1	D6	D7	D3	L1	L3	L4	L6	L5	D8	L7	LP
6	10.6	13.1	13.5	19.5	15	4.5	2	1.2	2	6	3.5
7	13	17.1	14.5	20.5	15	5.5	2.8	1.2	2	6.2	3.5
8	13	17.1	15.8	20.5	15	5.5	2.8	1.2	2	6.2	3.5
9	13	17.1	16.5	20.5	15	5.5	2.8	1.2	2	6.2	3.5
10	14	18.1	21	20.5	15	5.5	2.8	1.2	2	6.2	3.5
11÷12	16.5	20.6	22	23.5	18	5.5	2.8	1.2	2	6.2	3.5
13÷14	19	23.1	24	28	22	6	2.8	1.2	2	6.7	4
15	21	26.9	24	29	22	7	3.7	1.3	2.5	7.6	4
16÷17	21	26.9	26	30	23	7	3.7	1.3	2.5	7.6	4
18	25	30.9	29	32	24	8	3.7	1.3	3	8.5	4.5
19÷20	25	30.9	30	33	25	8	3.7	1.3	3	8.5	4.5
21÷22	30	35.4	34	33	25	8	3.7	1.8	3.5	8.5	5
23÷24	30	35.4	35	35	27	8	3.7	1.8	3.5	8.5	5
25÷27	33	38.2	37	35.5	27	8.5	3.7	1.8	4	9.1	5
28	38	43.3	42	38	29	9	3.7	1.8	4	9.6	6
29÷32	38	43.3	45	39	30	9	3.7	1.8	4	9.6	6
33÷34	45	53.5	45	50.5	39	11.5	5.4	2.1	5	12	7.5
35÷37	45	53.5	50	50.5	39	11.5	5.4	2.1	5	12	7.5
38÷43	52	60.5	54	50.5	39	11.5	5.4	2.1	5	12	7.5
44÷49	57	65.5	56	52.5	41	11.5	5.4	2.1	5	13	8.5
50	64	72.5	69	56.5	45	11.5	5.4	2.1	5	13	8.5
55	64	72.5	74	58.5	47	11.5	5.4	2.1	5	13	8.5
60	72	79.3	80	60.5	49	11.5	5.4	2.1	5	13.5	8.5
65	77	84.5	87	62.5	51	11.5	5.4	2.1	5	13.5	8.5
70	82	89.5	92	62.5	51	11.5	5.4	2.1	5	13.5	8.5
75	87	94.5	97	68.5	57	11.5	5.4	2.1	5	13.5	8.5
80	92	99.5	102	70.5	59	11.5	5.4	2.1	5	13.5	8.5
85	98	105.5	110	72.5	59	13.5	5.4	2.6	5	13.5	8.5
90	105	111.5	117	75.5	62	13.5	5.4	2.6	5	13.5	8.5
95	110	116.5	122	75.5	62	13.5	5.4	2.6	5	13.5	8.5
100	114	119.5	127	88.5	75	13.5	5.4	2.6	5	13.5	8.5
110	124	132.2	143	92.5	75	17.5	7.1	3.9	5	13.5	8.5
120	134	142.2	155	102.5	85	17.5	7.1	3.9	5	13.5	8.5
130	145	153.2	166	112.5	95	17.5	7.1	3.9	5	13.5	8.5
135	152	161.2	171	113.5	95	18.5	7.1	3.9	5	13.5	8.5
140	157	164.3	178	118.5	100	18.5	7.1	3.9	5	13.5	8.5
150	167	174.2	188	128.5	110	18.5	7.1	3.9	5	13.5	8.5
160	188	195	199	141	120	21	9.1	3.9	5	13.5	8.5