

NYLON PA 6 SPIRAL HOSE

Spiraled round in Nylon PA 6. In this material we produce spirals using calibrated extruded wire.

FEATURES



Starting from extruded wire calibrated by diameters from 2 to 5 mm, we produce **spirals of protection of metal pipes**. The high melting temperature of this product makes it an **excellent material for protection from rubbing** metal pipes.

SECTORS

INDUSTRIAL

APPLICATIONS

INDUSTRIAL AUTOMATION

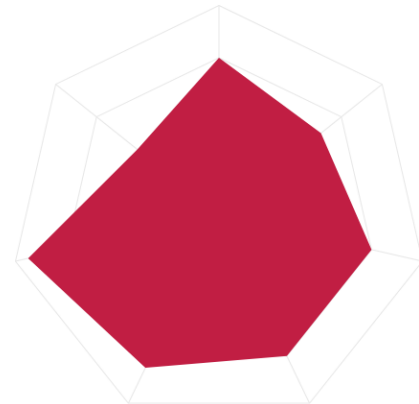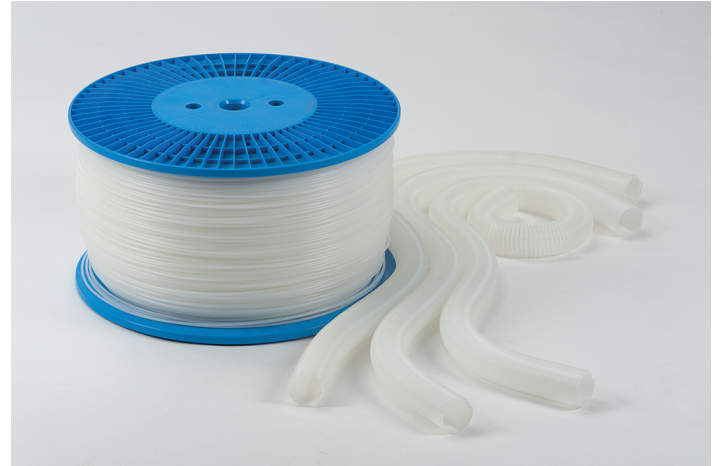

PRESSURE/TEMPERATURE

Operating temperature: from -10°C to 80°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

