

RILSAN® PA 11 PHL SPIRAL HOSE

Flexible spiral hose in Rilsan® PA 11 PHL of vegetable origin. Excellent working memory and abrasion resistance.

FEATURES

Among the polyamides, for the production of **standard spirals**, the **PA 11** was chosen for its surprising elastic memory, as well as **exceptional flexibility**, which guarantee high performance and longevity to the product. The **PA 11 PHL Rilsan brand®** is produced from renewable sources and is the preferred solution of those looking for the best among polyamides, with an eye to nature.

SECTORS

INDUSTRIAL

APPLICATIONS


INDUSTRIAL AUTOMATION

ROBOTICS

MACHINE TOOLS

VACUUM

CHEMICAL RESISTANCE

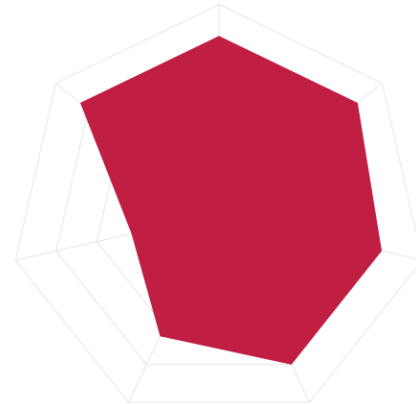

Products

Part number	Inner diameter (iØ)	Outer diameter (oØ)	Wall thickness	Operating pressure (23°C)	Standard colors	Material length	Working length	Retracted length	Turns n	Tale A	Tale B	winding Ø	outer Ø
SR2X4X2.5C	2 mm	4 mm	1 mm	44 BAR	(T)	2.5 m	1.5 m	92 mm	22 N	100 mm	100 mm	30 mm	38 mm
SR2X4X10	2 mm	4 mm	1 mm	44 BAR	(A)	10 m	6.5 m	564 mm	94 N	0 mm	0 mm	20 mm	38 mm
SR2X4X20	2 mm	4 mm	1 mm	44 BAR		20 m	13 m	791 mm	188 N	0 mm	0 mm	30 mm	38 mm
SR2X4X25	2 mm	4 mm	1 mm	44 BAR		25 m	16.5 m	989 mm	235 N	0 mm	0 mm	30 mm	38 mm
SR2.5X4X2.5C	2.5 mm	4 mm	0.75 mm	30 BAR	(T)	2.5 m	1.5 m	92 mm	22 N	100 mm	100 mm	30 mm	38 mm
SR2.5X4X7.5C	2.5 mm	4 mm	0.75 mm	30 BAR		7.5 m	5 m	290 mm	69 N	100 mm	100 mm	30 mm	38 mm
SR2.5X4X10	2.5 mm	4 mm	0.75 mm	30 BAR	(A)	10 m	6.5 m	395 mm	134 N	0 mm	0 mm	20 mm	38 mm
SR2.5X4X15	2.5 mm	4 mm	0.75 mm	30 BAR		15 m	10 m	593 mm	141 N	0 mm	0 mm	30 mm	38 mm
SR4X6X7.5C	4 mm	6 mm	1 mm	26 BAR	(G) (T)	7.5 m	5 m	258 mm	41 N	130 mm	130 mm	50 mm	62 mm
SR4X6X10C	4 mm	6 mm	1 mm	26 BAR	(T)	10 m	6.5 m	353 mm	56 N	130 mm	130 mm	50 mm	62 mm
SR4X6X10	4 mm	6 mm	1 mm	26 BAR		10 m	6.5 m	328 mm	52 N	0 mm	0 mm	55 mm	67 mm
SR4X6X12	4 mm	6 mm	1 mm	26 BAR		12 m	8 m	934 mm	148 N	0 mm	0 mm	20 mm	32 mm
SR4X6X15C	4 mm	6 mm	1 mm	26 BAR	(T)	15 m	10 m	530 mm	84 N	130 mm	130 mm	50 mm	62 mm
SR4X6X15	4 mm	6 mm	1 mm	26 BAR		15 m	10 m	498 mm	79 N	0 mm	0 mm	55 mm	67 mm

Part number	Inner diameter (iØ)	Outer diameter (oØ)	Wall thickness	Operating pressure (23°C)	Standard colors	Material length	Working length	Retracted length	Turns n	Tale A	Tale B	winding Ø	outer Ø
SR4X6X17	4 mm	6 mm	1 mm	26BAR		17 m	11 m	953mm	151 N	0 mm	0 mm	30 mm	42 mm
SR4X6X25	4 mm	6 mm	1 mm	26 BAR	BS A	25 m	16.5 m	903 mm	143 N	0 mm	0 mm	50 mm	62 mm
SR4X6X30	4 mm	6 mm	1 mm	26 BAR	BS A AS AR	30 m	19.5 m	991 mm	157 N	0 mm	0 mm	55 mm	67 mm
SR6X8X7.5	6 mm	8 mm	1 mm	19 BAR	BS A	7.5 m	5 m	286 mm	34 N	130 mm	130 mm	60 mm	76 mm
SR6X8X7.5	6 mm	8 mm	1 mm	19 BAR		7.5 m	5 m	261 mm	31 N	0 mm	0 mm	70 mm	86 mm
SR6X8X10	6 mm	8 mm	1 mm	19 BAR	N BS AS AR	10 m	6.5 m	387 mm	46 N	130 mm	130 mm	60 mm	76 mm
SR6X8X10	6 mm	8 mm	1 mm	19 BAR		10 m	6.5 m	345 mm	41 N	0 mm	0 mm	70 mm	86 mm
SR6X8X12	6 mm	8 mm	1 mm	19 BAR		12 m	8 m	850 mm	101 N	0 mm	0 mm	30 mm	46 mm
SR6X8X15	6 mm	8 mm	1 mm	19 BAR	BS A AS	15 m	10 m	581 mm	69 N	130 mm	130 mm	60 mm	76 mm
SR6X8X15	6 mm	8 mm	1 mm	19 BAR		15 m	10 m	522 mm	62 N	0 mm	0 mm	70 mm	86 mm
SR6X8X25	6 mm	8 mm	1 mm	19 BAR	BS A AS	25 m	16.5 m	993 mm	118 N	0 mm	0 mm	60 mm	76 mm
SR6X8X30	6 mm	8 mm	1 mm	19 BAR	N BS AS AR	30 m	19.5 m	917 mm	123 N	0 mm	0 mm	80 mm	86 mm
SR6X8X55	6 mm	8 mm	1 mm	19 BAR		55 m	36 m	1069 mm	127 N	0 mm	0 mm	130 mm	146 mm
SR8X10X5	8 mm	10 mm	1 mm	14 BAR		5 m	3.5 m	189 mm	18 N	0 mm	0 mm	80 mm	100 mm
SR8X10X7.5	8 mm	10 mm	1 mm	14 BAR	A T	7.5 m	5 m	263 mm	25 N	170 mm	170 mm	80 mm	100 mm
SR8X10X10	8 mm	10 mm	1 mm	14 BAR	A T	10 m	6.5 m	357 mm	34 N	170 mm	170 mm	80 mm	100 mm

Part number	Inner diameter (iØ)	Outer diameter (oØ)	Wall thickness	Operating pressure (23°C)	Standard colors	Material length	Working length	Retracted length	Turns n	Tale A	Tale B	winding Ø	outer Ø
SR8X10X108 mm	10 mm	10 mm	1 mm	14BAR		10 m	6.5 m	336mm	32 N	0 mm	0 mm	90 mm	110mm
SR8X10X158 mm	10 mm	10 mm	1 mm	14 BAR	BS A T	15 m	10 m	547 mm	52 N	170 mm	170 mm	80 mm	100 mm
SR8X10X158 mm	10 mm	10 mm	1 mm	14 BAR		15 m	10 m	505 mm	48 N	0 mm	0 mm	90 mm	110 mm
SR8X10X258 mm	10 mm	10 mm	1 mm	14 BAR	A AS	25 m	16.5 m	936 mm	89 N	0 mm	0 mm	80 mm	100 mm
SR8X10X308 mm	10 mm	10 mm	1 mm	14 BAR	BS A AS R AR T	30 m	19.5 m	1010 mm	96 N	0 mm	0 mm	90 mm	110 mm
SR10X12X710 mm	12 mm	12 mm	1 mm	12 BAR	T	7.5 m	5 m	252 mm	20 N	180 mm	180 mm	100 mm	124 mm
SR10X12X100 mm	12 mm	12 mm	1 mm	12 BAR	A T	10 m	6.5 m	353 mm	28 N	180 mm	180 mm	100 mm	124 mm
SR10X12X100 mm	12 mm	12 mm	1 mm	12 BAR		10 m	6.5 m	328 mm	29 N	0 mm	0 mm	100 mm	124 mm
SR10X12X150 mm	12 mm	12 mm	1 mm	12 BAR	A T	15 m	10 m	530 mm	42 N	180 mm	180 mm	100 mm	124 mm
SR10X12X150 mm	12 mm	12 mm	1 mm	12 BAR		15 m	10 m	492 mm	39 N	0 mm	0 mm	110 mm	134 mm
SR10X12X300 mm	12 mm	12 mm	1 mm	12 BAR	N BS A AS R	30 m	19.5 m	997 mm	79 N	0 mm	0 mm	110 mm	134 mm
SR12X15X152 mm	15 mm	15 mm	1.5 mm	14 BAR	T	15 m	10 m	426 mm	27 N	200 mm	200 mm	160 mm	190 mm
SR12X15X302 mm	15 mm	15 mm	1.5 mm	14 BAR	BS A AS	30 m	19.5 m	915 mm	58 N	0 mm	0 mm	150 mm	180 mm
SR14X18X304 mm	18 mm	18 mm	2 mm	16 BAR	T	30 m	19.5 m	1023 mm	54 N	0 mm	0 mm	160 mm	196 mm
SR15X18X305 mm	18 mm	18 mm	1.5 mm	12 BAR	T	30 m	19.5 m	1023 mm	54 N	0 mm	0 mm	160 mm	196 mm
SR18X22X158 mm	22 mm	22 mm	2 mm	13 BAR		15 m	10 m	509 mm	22 N	0 mm	0 mm	200 mm	244 mm

Part number	Inner diameter (iØ)	Outer diameter (oØ)	Wall thickness	Operating pressure (23°C)	Standard colors	Material length	Working length	Retracted length	Turns n	Tale A	Tale B	winding Ø	outer Ø
SR18X22X308	18 mm	22 mm	2 mm	13BAR		30 m	19.5 m	995mm	43 N	0 mm	0 mm	200mm	244mm
SR20X24X520	20 mm	24 mm	2 mm	12 BAR	(T)	50 m	32.5 m	960 mm	38 N	0 mm	0 mm	400 mm	448 mm

PRESSURE/TEMPERATURE

Operating temperature: from -40°C to 80°C

Safety factor on working pressure: 3:1

Here on the side: Graph of pressure drop expressed as a % in relation to temperature

